
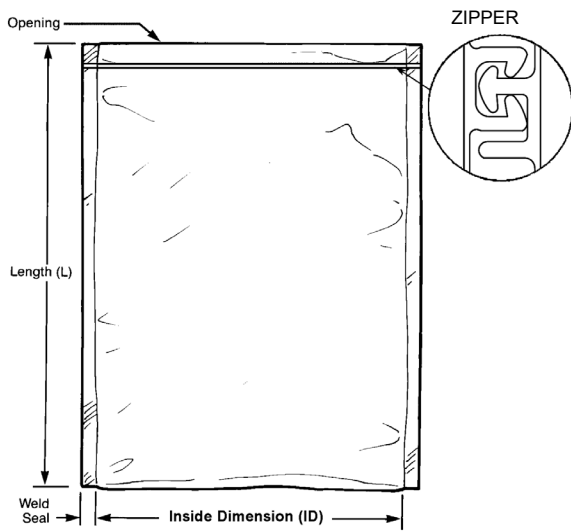


Moisture Barrier Bag Custom Drawing Worksheet

Meets ANSI/ESD S20.20 and EN 61340-5-1, Packaging standard ANSI/ESD S541,
and Static Control Bag ANSI/ESD S11.4

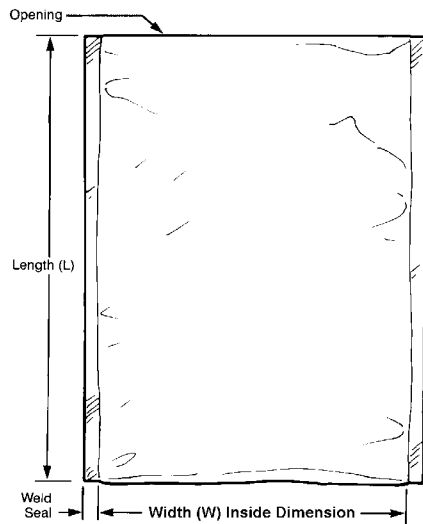

MATERIAL:

<input type="checkbox"/> 3370	Moisture Barrier, 3.6 mil, Aluminized	meets S11.4 Level 3 (except Transparency)
<input type="checkbox"/> Dri-Shield 2000	Moisture Barrier, 3.6 mil, Aluminized	meets S11.4 Level 3 (except Transparency)
<input type="checkbox"/> Dri-Shield 2700	Moisture Barrier, 7.0 mil, Aluminized	meets S11.4 Level 3 (except Transparency)
<input type="checkbox"/> Dri-Shield 3000	Moisture Barrier, 6.0 mil, Foil,	meets S11.4 Level 1 and J-STD-033C
<input type="checkbox"/> Dri-Shield 3400	Moisture Barrier, 4.0 mil, Foil,	meets S11.4 Level 1 and J-STD-033C
<input type="checkbox"/> Dri-Shield 3700	Moisture Barrier, 4.2 mil, Foil, Puncture Resistant,	meets S11.4 Level 1 and J-STD-033C

BAG OPENING:

- Open Top
- Zipper Top* Distance from bag opening: _____
- Rip Top/Tamper Evident* Distance from bag opening: _____ **Only available if thickness is 4.2 mil or less*
- Tear Notch Distance from bag opening: _____

SIZE:

Inside Dimension: Width (W) _____ Length (L) _____

QUANTITY:

DETERMINING THE CORRECT SIZE BAG FOR YOUR APPLICATION:

Width is measured from inside seam to inside seam.
Length is measured from the top edge to the bottom fold.
Opening is in the "width" dimension.
Width = Item Height + Item Width + 1 inch (25mm)
Length = Item Height + Item Length + 2.5 inches (64mm)

*The length of barrier bags may be extended further to allow for multiple vacuum sealing cycles.
This is a guide, it is not intended to be exact for your product. As always, ask for a sample before determining your purchase.*

MARKINGS:

***Note: Colors are Blue, Black, Yellow and Red** Plate #: (If Known) _____

Hot Stamp Color: _____ SEND/ATTACH ARTWORK _____

Printed Color: _____ SEND/ATTACH ARTWORK _____

No Markings

Labeled Type: _____ SEND/ATTACH ARTWORK _____

Embossed SEND/ATTACH ARTWORK _____

NOTES:

Digital .EPS vector art file required, version CS4 or older.

SHIPPING & PACKAGING:

Custom Packaging or Shipping

NOTES:

Company Name _____

Contact Name _____

Signature _____

Special manufactured items are not returnable for credit
Side Weld Seals: 3/8" (± 1/8") (9.5mm ± 3.2mm)
Tolerance W: -0", +0.250" (-0mm +6.4mm) / Tolerance L: ±0.125" (± 3.2mm)

MOISTURE BARRIER BAG CUSTOM DRAWING WORKSHEET



926 JR Industrial Drive, Sanford, NC 27332
WEB SITE: StaticControl.com
PHONE (919) 718-0000

DRAWING NUMBER
Custom Bag
Worksheet

DATE
December
2016