




Custom Toe Grounder

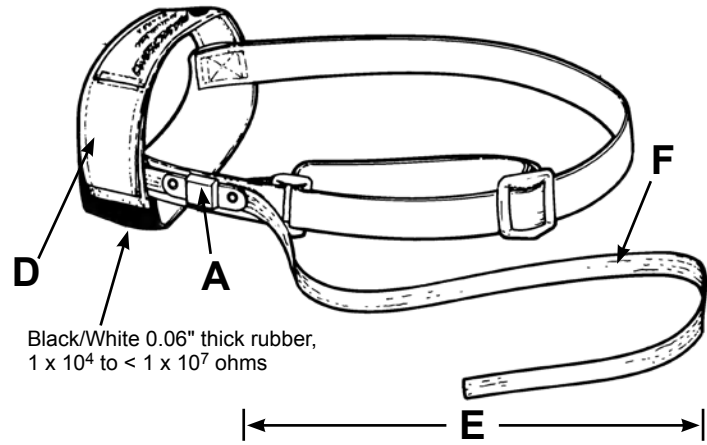


Black/White 0.06" thick rubber,
1 x 10⁴ to < 1 x 10⁷ ohms

- A. Resistor Type: None 1 megohm 2 megohms
- B. Resistor Location: Internal
- C. Closure Type: Hook & Loop D-Ring Snap-Loc
- D. Velcro Color: Blue Black Burgundy Red Ridged Orange
- E. Tab Length: 18" 24" 30"
- F. Tab Color: Grey


B. Resistor Location




Internal Resistor



Snap-Loc



D-Ring



Hook & Loop

C. Closure Type

Detailed Description:

Company Name _____

Contact Name _____

Signature _____

Meets ANSI/ESD S20.20, ESD SP9.2 tested per ESD TR53
 Per ESD SP9.2 APPENDIX E - Foot Grounder Classification
 Electrical Resistance Value:
 Foot Grounder Standard Use Type A 8.0 x 10⁵ to 3.5 x 10⁷ Ohms
 Foot Grounder Special Use High Type B 3.5 x 10⁷ to 1.0 x 10⁹ Ohms
 Foot Grounder Special Use Low Type C < 8.0 x 10⁵ ohms

Special manufactured items are not returnable for credit

Dimensional Tolerances are +/- 10% unless otherwise specified

CUSTOM TOE GROUNDER DRAWING WORKSHEET



926 JR Industrial Drive, Sanford, NC 27332
 WEB SITE: StaticControl.com
 PHONE (919) 718-0000

DRAWING NUMBER
 Custom Toe Grounder Worksheet

DATE
 April 2015