


CTC061 WS Aware Monitor

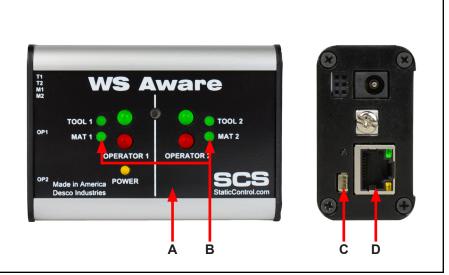

770067 WS Aware Monitor

## Differences Between Models CTC061 and 770067

- A. Black face plate with new labeling for Tool, Mat, and Operator circuits.
- B. Mat default test limit is set to 100 megohms. It may still be configured up to 1 gigohm via SMP.
- C. New terminal for use with the SCS 770069 Power Relay accessory.

D. Connector with 4.20 mA output and optical relay terminal replaced with Ethernet jack that provides network communication between the WS Aware Monitor and <u>Static Management Program (SMP)</u>.

